


TLN PulseCap™ Series



Tantalum Solid Electrolytic Chip Capacitors



- Large case size for maximum capacitance
- 3x reflow 260°C compatible
- Capacitance up to 3300uF
- Low profile solution
- Consumer applications
(e.g. PCMCIA/USB wireless express cards etc.)

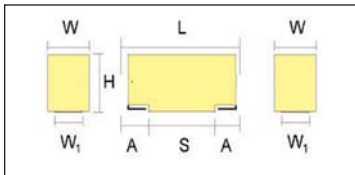

For part marking see page 123

CASE DIMENSIONS: millimeters (inches)

Code	EIA Code	EIA Metric	L+0.5/-0.0 (+0.02/-0.0)	W+0.5/-0.0 (+0.02/-0.0)	H max.	W ₁ ±0.20 (0.008)	A+0.30/-0.20 (0.008/-0.012)
4	2924	7361-20	7.3 (0.287)	6.1 (0.240)	2.0 (0.079)	4.75 (0.187)	2.0 (0.079)
6	0630	1575-20	14.5 (0.571)	7.5 (0.295)	2.0 (0.079)	5.5 (0.217)	2.4 (0.094)
Under development							

HOW TO ORDER

TLN

Type

6

Case Code
See table above

228

Capacitance Code
pF code

M

Tolerance
M = ±20%

006

Rated DC Voltage
004 = 4Vdc
006 = 6.3Vdc
010 = 10Vdc

R

Packaging
R = Standard

0055

ESR in mΩ

TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C				
Capacitance Range:	2.2 mF				
Capacitance Tolerance:	±20%				
Leakage Current DCL:	0.01CV				
Rated Voltage (V _R)	≤ + 85°C:	4	6.3	10	
Category Voltage (V _C)	≤ + 85°C:	2	3.15	5	
Category Voltage (V _C)	≤ + 125°C:	0.8	1.26	2	
Temperature Range:	-55°C to +125°C with category voltage				
Reliability:	0.2% per 1000 hours at 85°C, 0.5xV _R with 0.1Ω/V series impedance with 60% confidence level				
	Meets requirements of AEC-Q200				

TLN PulseCap™ Series



Tantalum Solid Electrolytic Chip Capacitors

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Voltage Rating DC (V_R) to 85°C		
mF	Code	4V (G)	6.3V (J)	10V (A)
1.0	108			6(55)
1.5	158			6(55)
2.2	228		4(100)*	
3.3	338	6(55)		

Engineering samples - please contact manufacturer

*Codes under development – subject to change.

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Capacitance (μ F)	Rated Voltage (V)	DCL (μ A) Max.	ESR Max. ($m\Omega$) @100kHz	100kHz Ripple Current (mA)			100kHz Ripple Voltage (mV)		
						25°C	85°C	125°C	25°C	85°C	125°C
4 Volt @ 40°C (2V @ 85°C, 0.8V @ 125°C)											
TLN6338M004#0055	6	3300	4	132	55	2045	1840	818	112	101	45
6.3 Volt @ 40°C (3.15V @ 85°C, 1.26V @ 125°C)											
TLN6228M006#0055	6	2200	6.3	132	55	2045	1840	818	112	101	45
10 Volt @ 40°C (5V @ 85°C, 2V @ 125°C)											
TLN6108M010#0055	6	1000	10	100	55	2045	1840	818	112	101	45
TLN6158M010#0055	6	1500	10	150	55	2045	1840	818	112	101	45

Engineering samples - please contact manufacturer

- Insert R for standard packaging

All technical data relates to an ambient temperature of +25°C. Capacitance is measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

TLN PulseCap™ series is MSL level 3 device according to J-STD-020C.

ESR allowed to move up to 1.25 times catalogue limit post mounting.

DCL allowed to move up to 2.00 times catalogue limit post mounting.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

